



DESCRIPTION

KOM U spring-loaded backdraft damper is manufactured of 24/26 gauge galvanized steel and contains rubber seal, it is especially designed to prevent backdraft. KOM U also prevents the entry of birds and other wildlife.


Temperature range: up to +212 °F.

SUITABLE FOR

Bathroom / kitchen / apartments / cottages / small offices.

DIMENSIONS



Model	Measurements [in.]	
	Ø D	L
KOM U 100	4"	3 1/2"
KOM U 125	5"	4 3/8"
KOM U 150	6"	4 7/8"
KOM U 200	8"	6 1/8"
KOM U 250	10"	6 7/8"
KOM U 315	12 3/8"	7 7/8"



STEEL GAUGE

Item	Thickness [mm]	Gauge
KOM U 100	0.5	26
KOM U 125	0.5	26
KOM U 150	0.7	24
KOM U 200	0.7	24
KOM U 250	0.7	24
KOM U 315	0.7	24

DIAGRAMS OF PRESSURE LOSS

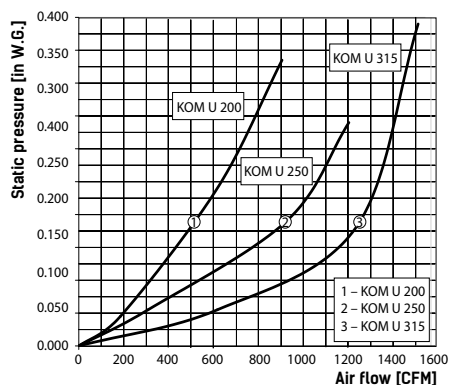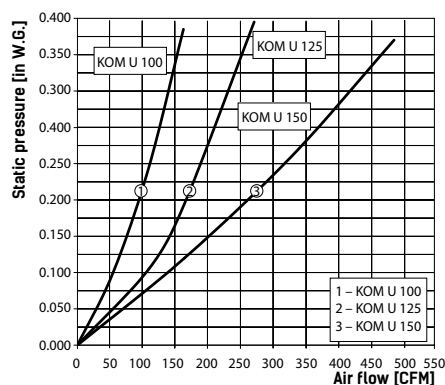

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by: