

CASING

Steel casing is covered with high quality multilayer aluminium and zinc alloy to prevent corrosion. The casing is equipped with a switch to turn the ventilator off when the service panel is opened. Service access from both left and right side. For outdoor installation the roof is necessary (optional).

ENERGY RECOVERY CORE

Unique enthalpy heat exchanger provides high-efficient heat & humidity recovery. No drain pan required.

FANS

The unit is equipped with supply and exhaust centrifugal fans with backward curved blades and built-in thermal overheating protection with automatic restart. The electric motors and impellers are dynamically balanced.

DEFROST SYSTEM

Fan stop defrost system is activated when the outdoor temperature falls below 23° F (-5° C).

FILTER

Washable MERV 6 air filters in exhaust and supply air streams. Filters MERV 8, MERV 13 optional.

ERV 5

Additional Air Pressure Drop with optional filters		
Filter type	Airflow CFM	
	100	200
MERV 8	0.03	0.06
MERV 13	0.2	0.4

ERV 8

Additional Air Pressure Drop with optional filters		
Filter type	Airflow CFM	
	150	300
MERV 8	0.04	0.08
MERV 13	0.25	0.5

CONTROL


The unit incorporates an integrated automation and control system with following functions:

- Operation mode switch.
- Airflow balancing by supply and exhaust fan independent speed adjustment.
- Automatic recovery core frost protection.
- External control device connection.





DIMENSIONS

Measurements [in]					
A	A2	H	H2	H3	L
25 1/2"	14"	26"	8"	4"	36 1/2"

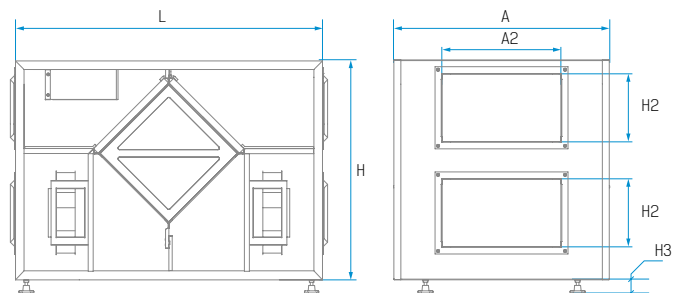

TECHNICAL DATA

Parameters	AIRLITE ERV 5
Voltage [V / 60 Hz]	1 ~ 120
Unit power [W]	460
Unit current [A]	3.8
Minimum circuit Amps [MCA]	4.8
Maximum over current protection [MOP]	6.2
Sensible effectiveness @ max airflow [%]	66
Air flow @ ESP 0.4" WG [cfm]	300
Air flow max [cfm]	350
Transported air temperature [F]	-35 up to +140
Outer skin casing material	21 gauge galvanized steel
Insulation	1" mineral wool
Connected air duct size [in]	8x14
Weight net [lb]	110
Weight gross [lb]	225

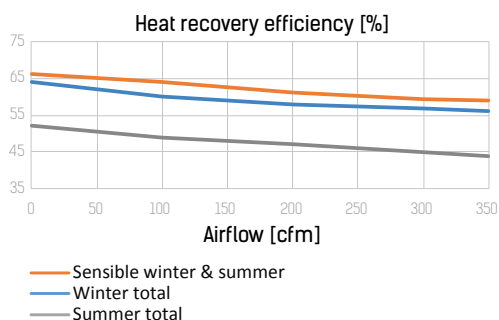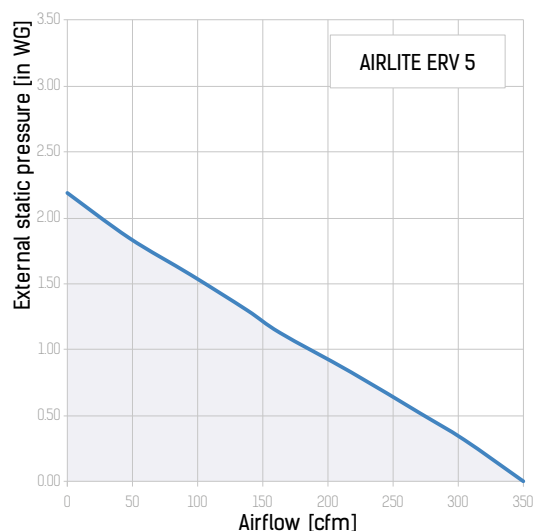

Acoustic Noise Power Chart (dBA) at unit ports


Airflow	Fresh air to building port	Exhaust air from building port
300 CFM at 0.4 in. w.g.	69 dBA	69 dBA
120 CFM at 0.2 in. w.g.	51 dBA	51 dBA

Note: Efficiencies are based on AHRI standard conditions

	Summer mode			Winter mode		
	Outdoor Air	Return Air	Supply Air	Outdoor Air	Return Air	Supply Air
Standard Flow Rate CFM	300	300	300	300	300	300
Dry Bulb °F	95	75	83.1	35	70	55.8
Wet Bulb °F	78	63	71.8	33	58	48.7
Enthalpy (H) BTU/lb	41.5	28.6	35.7	12.2	25.1	19.6
Moisture Ratio (MR) gr/lb	117.3	66.7	98.9	24.4	52.6	39.5

TECHNICAL DATA

Parameters	AIRLITE ERV 8
Voltage [V / 60 Hz]	1 ~ 120
Unit power [W]	640
Unit current [A]	5.4
Minimum circuit Amps [MCA]	6.8
Maximum over current protection [MOP]	8.8
Sensible effectiveness @ max airflow [%]	54
Air flow @ ESP 0.4" WG [cfm]	450
Air flow max [cfm]	510
Transported air temperature [F]	-35 up to +140
Outer skin casing material	21 gauge galvanized steel
Insulation	1" mineral wool
Connected air duct size [in]	8x14
Weight net [lb]	148
Weight gross [lb]	258

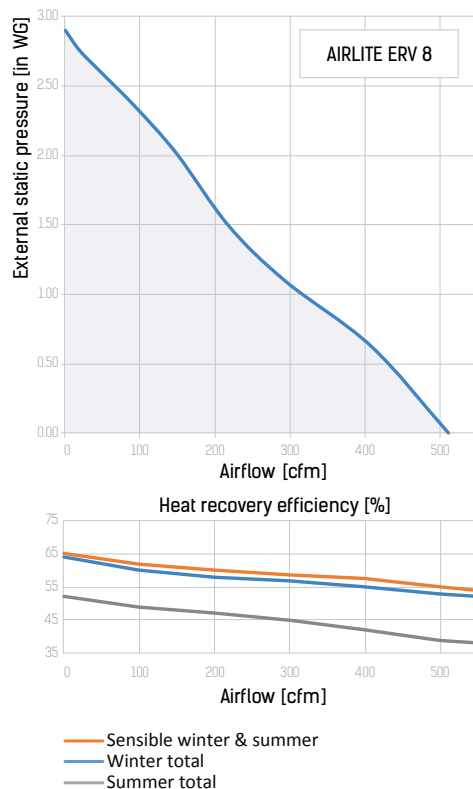

Acoustic Noise Power Chart (dBA) at unit ports

Airflow	Fresh air to building port	Exhaust air from building port
450 CFM at 0.4 in. wg.	76 dBA	76 dBA
180 CFM at 0.2 in. wg.	59 dBA	59 dBA

Note: Efficiencies are based on AHRI standard conditions

	Summer mode			Winter mode		
	Outdoor Air	Return Air	Supply Air	Outdoor Air	Return Air	Supply Air
Standard Flow Rate CFM	450	450	450	450	450	450
Dry Bulb °F	95	75	83.9	35	70	54.7
Wet Bulb °F	78	63	72.5	33	58	47.9
Enthalpy (H) BTU/lb	41.5	28.6	36.3	12.2	25.1	19.2
Moisture Ratio (MR) gr/lb	117.3	66.7	101.7	24.4	52.6	38.5

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by: